

SafeHous

INDUSTRIAL GRADE LEAK DETECTION SYSTEMS

Safehous Automated Shut-Off Valve

Automated Shut-Off Valve

Model: ASV-1000

Product Description

The Safehous Automated Shut-Off Valve works in tandem with the in-line leak sensor to instantly stop water flow when a leak is detected. Once triggered, the valve automatically closes to prevent further damage, protecting your property from costly water-related incidents. Designed for reliability and fast response, it integrates seamlessly with the Safehous App, giving you real-time notifications and remote control capabilities directly from your smartphone.

Features


- Industrial quality replaceable motor
- Can be manually operated
- Does not require constant power to hold open or close
- Becomes a smart device available for automatic water shut-off, when combined with one of our Valve Controllers

What's Included

- Mounting Hook w/3M Brand Mounting Tape
- Cable Sensor: 4.2 feet (1.2 meters). (Special 10 foot lengths available)
- Quick Start User Guide


Specifications

- SPECIFICATIONS:
- Voltage: DC 12V
- Thread: NPT Female
- Valve Body Material: Stainless Steel
- Open/Closed Time: Less Than 5 Sec
- Max. Torque Force For Actuator: 2 N.M
- Bore Reduction: None
- Cables Length: Approximately 1.5' (0.5 Meter)
- Max Working Pressure: 145 PSI (1.0MPA)
- Working Current: Max 500 Ma When Operating Only
- Environmental:
 - Liquid Temp. Range: 35.6° to 194°F (2° to 90°C)
 - Environment Temp. Range: -5 to 140F (-15° to 60°C)

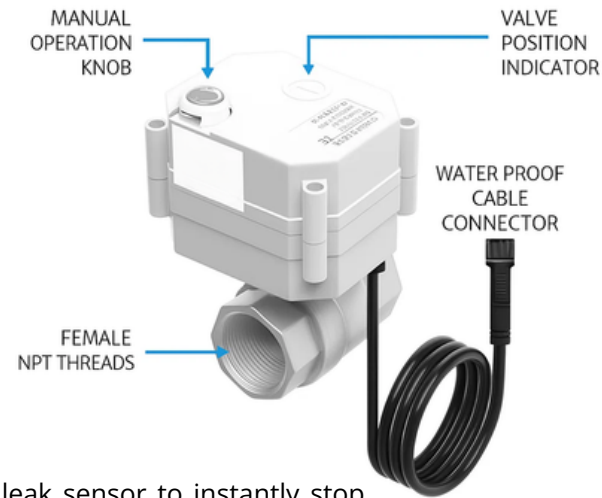

Dimensions

Aspect	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
A	2.13"	2.13"	2.13"	2.13"	1-1/2"	2.98"
B	1.65"	1.65"	1.65"	1.65"	2-1/2"	3.1"
C	2.8"	2.91"	2.93"	3.07"	5"	4.8"
D	.63"	.74"	.86"	.98"	1"	6.02"
E	3.43"	3.66"	3.86"	4.06"	6"	6.02"
F	.98"	1.22"	1.5"	1.81"	2-1/8"	2.4"

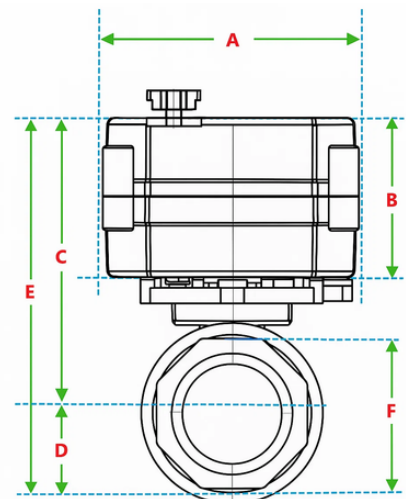

For More Info Please Call

☎ 866-310-1055 🌐 www.safehous.com